


## Firmware update for Zyxel VMG8623-T50A and VMG8623-T50B modems


Connect your PC to your modem using an ethernet cable (when connecting via Wi-Fi, the connection between the modem and the PC may be lost).

Open a web browser (Google Chrome, MS Edge, etc.).


In the address bar, type the IP address shown on the modem's label (<https://192.168.1.1>).

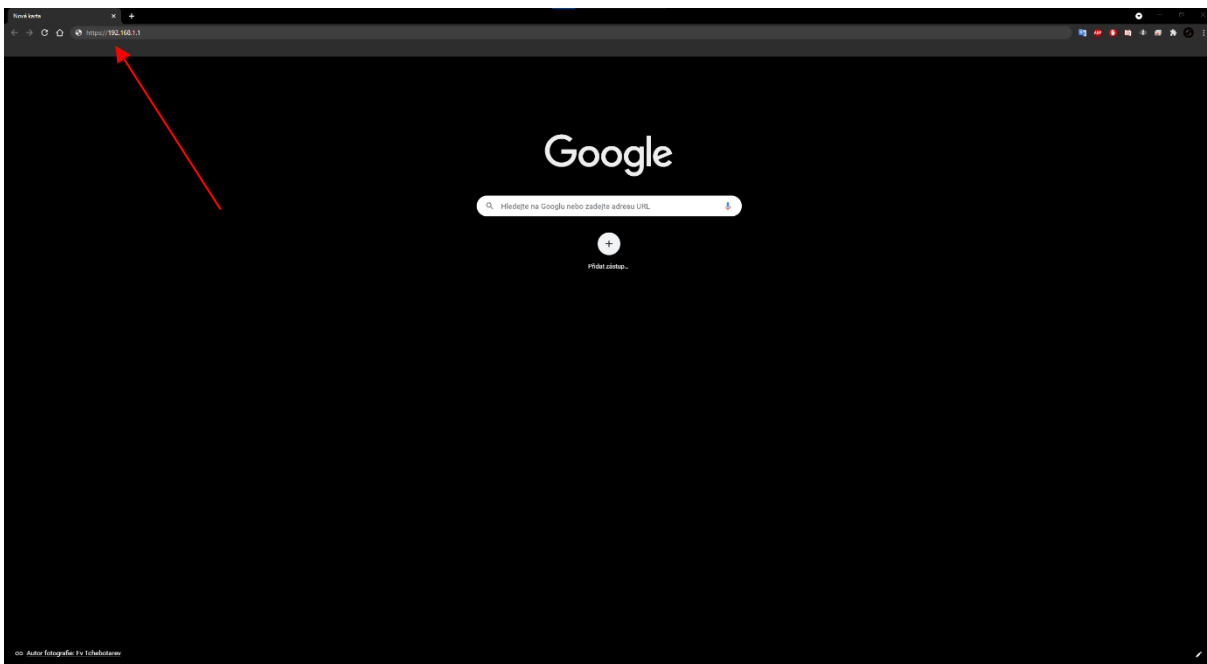


Click on "Advanced Settings".

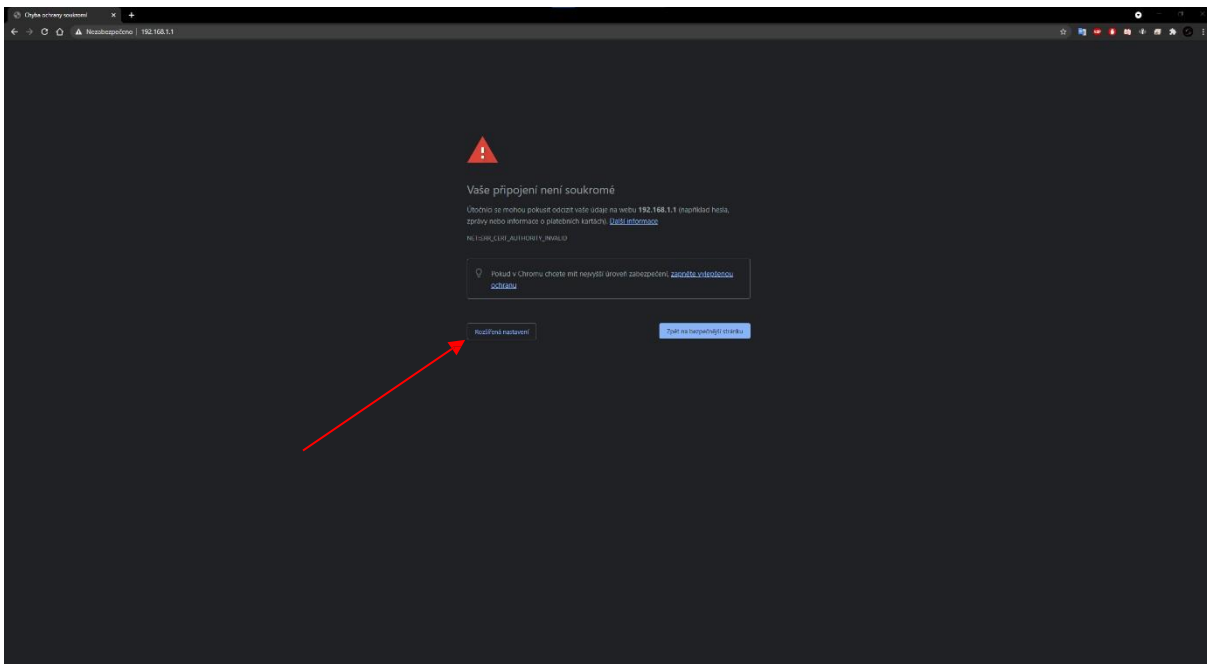


Click on "Continue to the website 192.168.1.1".

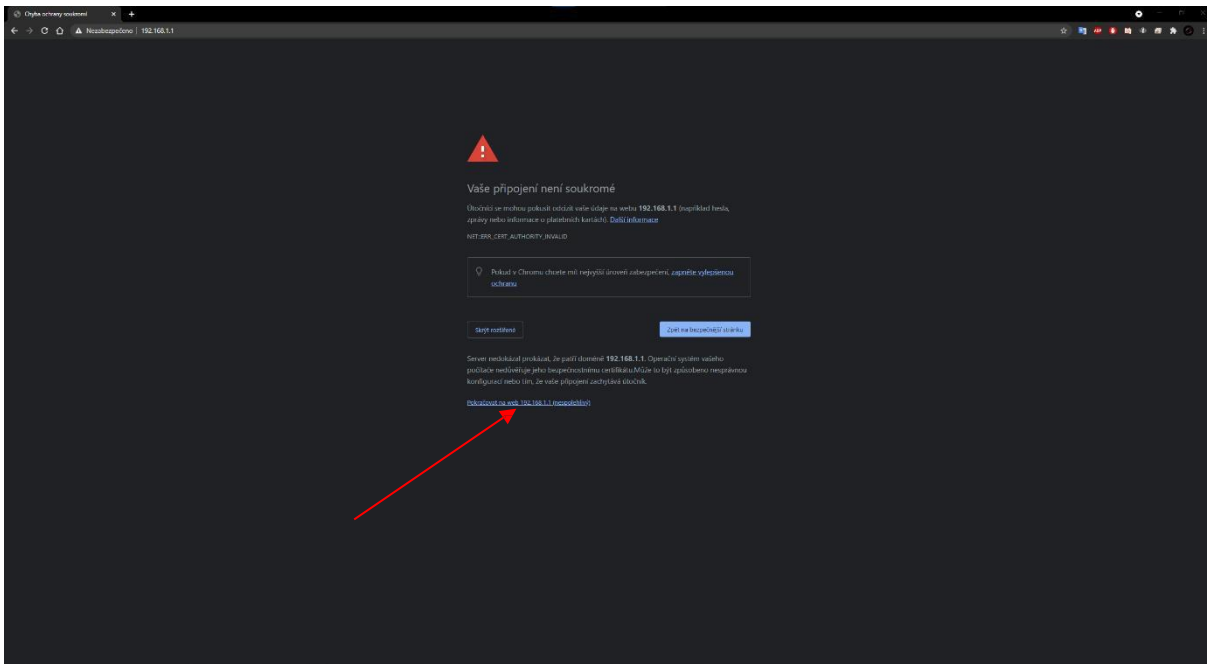


To log in to the modem, use the word "admin" as the username and the value shown on the label (Login password) as the password and log in to the modem interface.

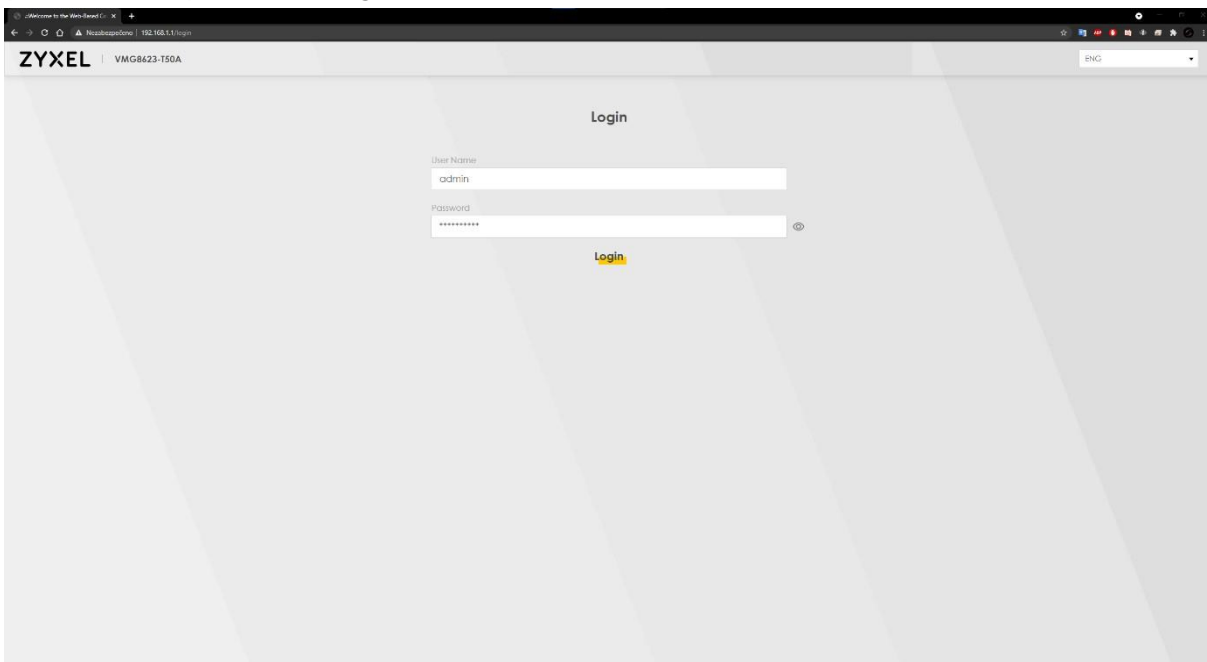


Check the current firmware version.

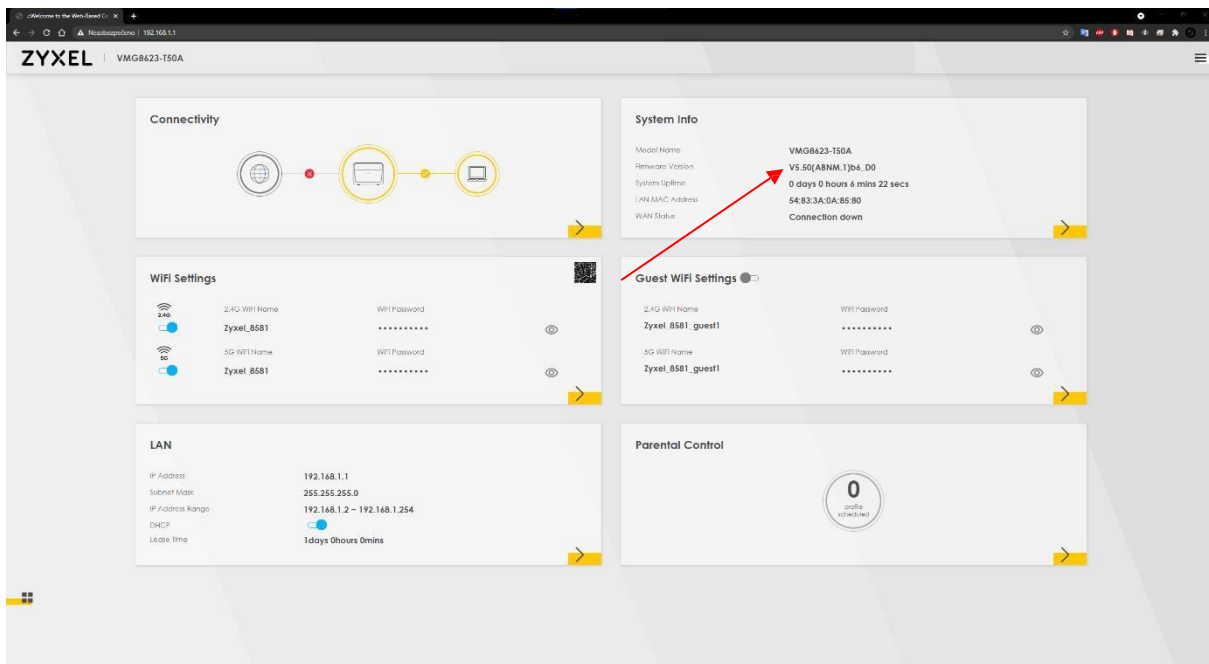


Click on the **3 horizontal lines** in the upper right part of the modem web interface.

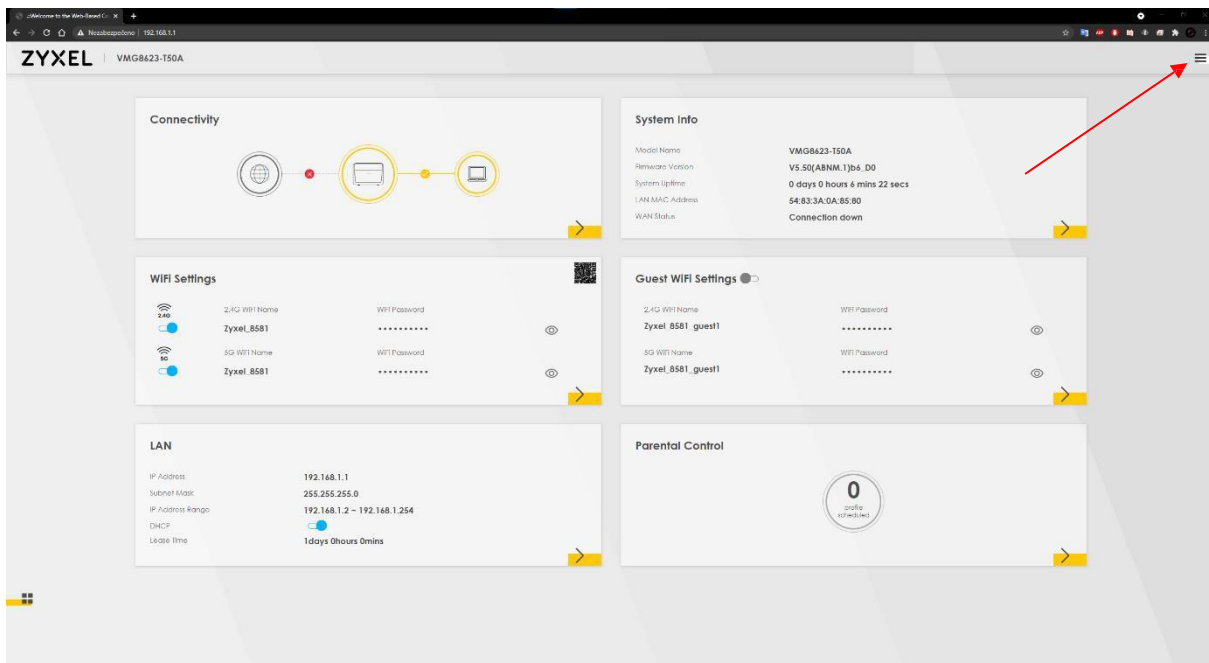


Click on „Maintenance“.

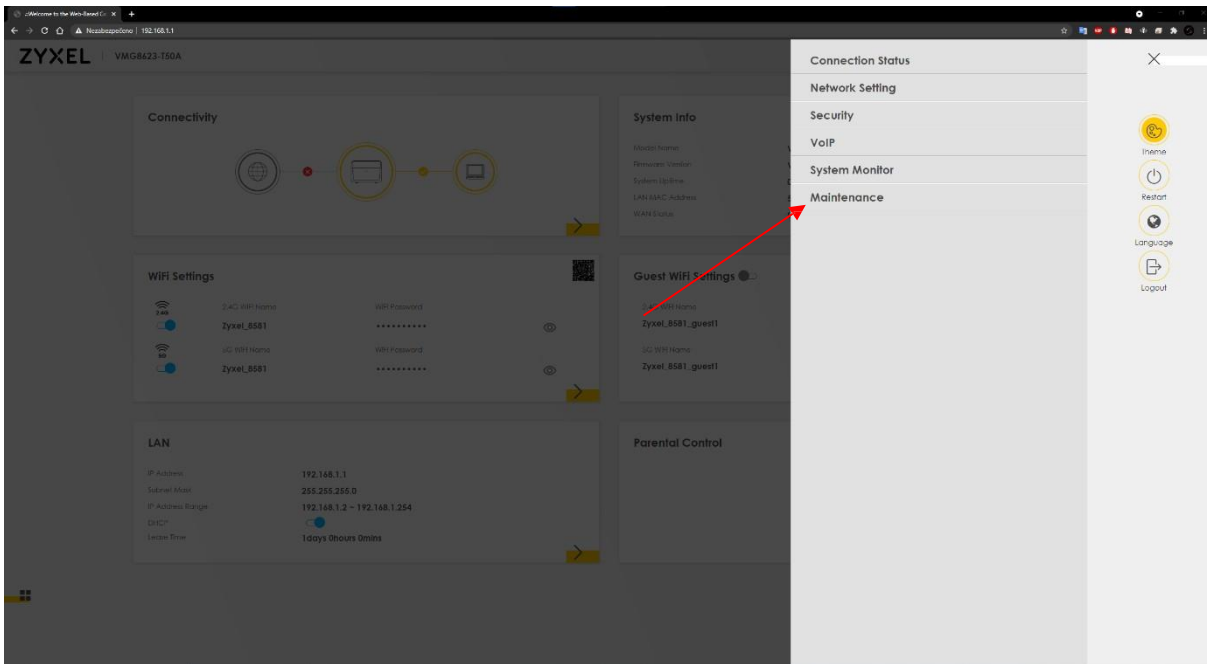


In the "Maintenance" menu, select the "Firmware Upgrade" option.

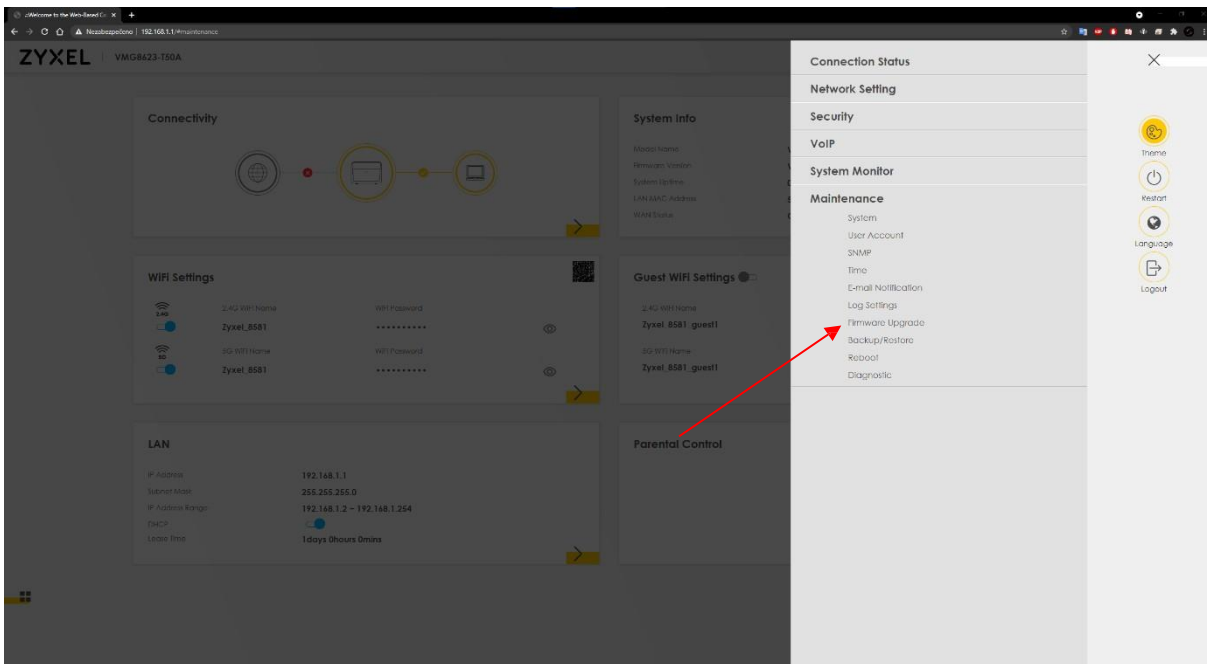


Click on „Vybrat soubor“.

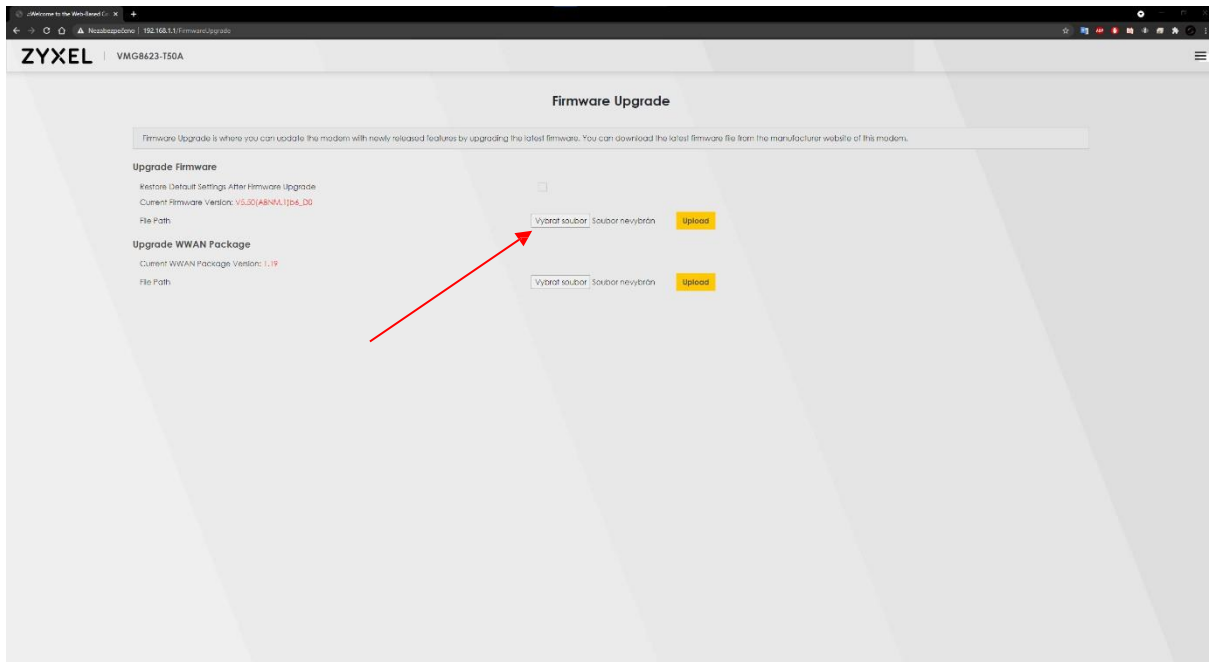


Locate the downloaded firmware file on your computer, click "Open" and after opening the file, click the "Upload" button. To prevent possible problems before installation, check the box "Restore Default Settings After Firmware Upgrade" (the modem's factory settings will be restored after installation).

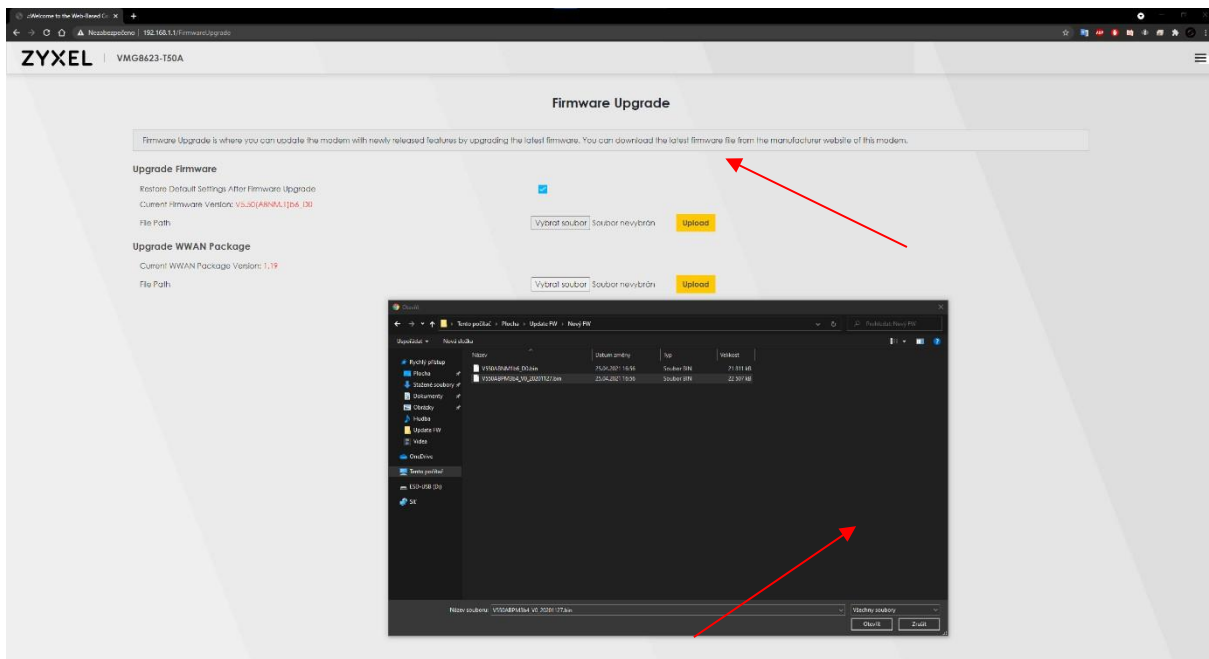


After clicking the “**Upload**” button, the firmware update installation will begin.

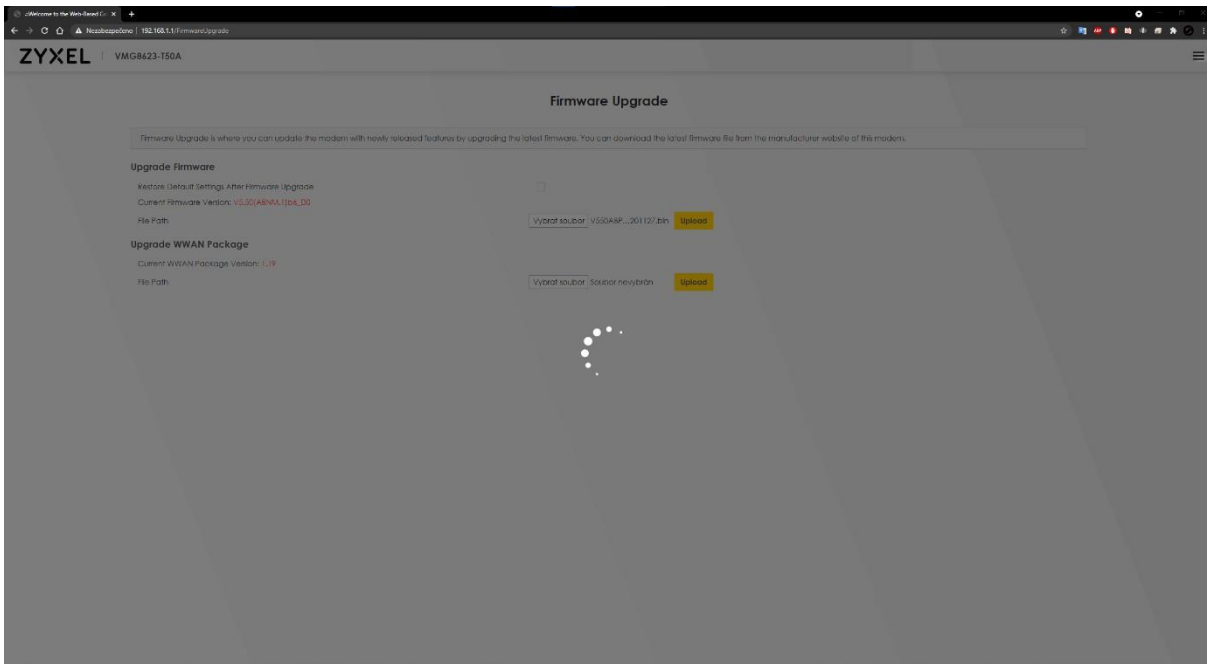

After the installation is complete, the login page of the administration interface will appear again.

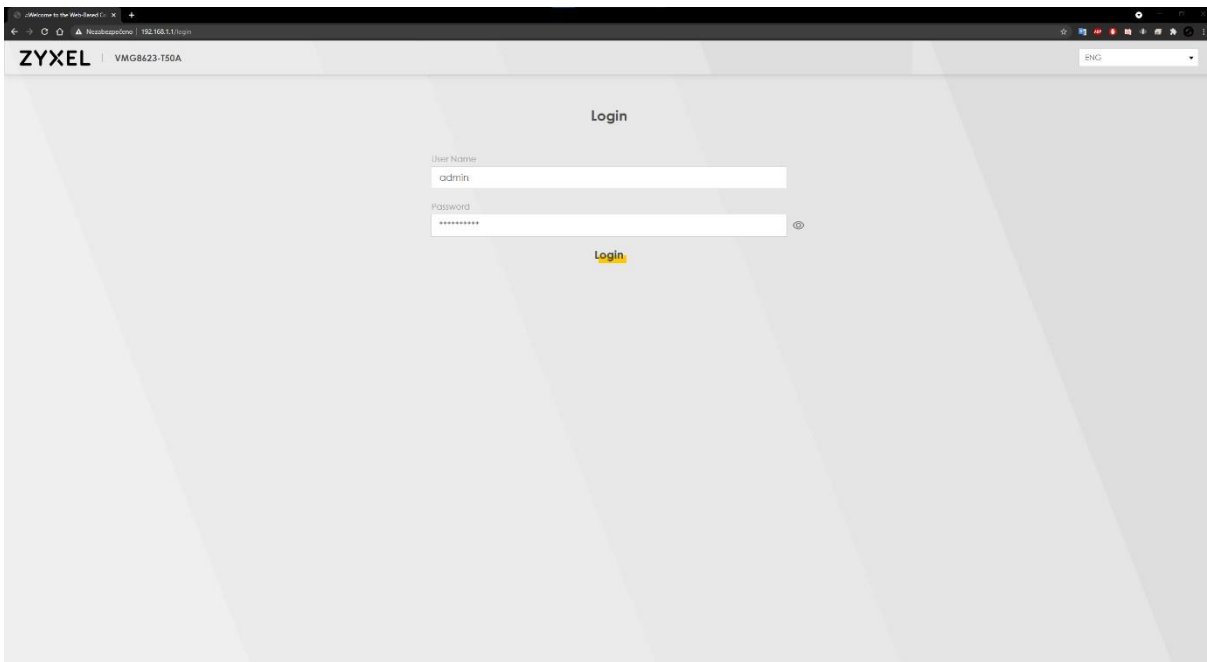

Log in to the modem interface again to verify the firmware.

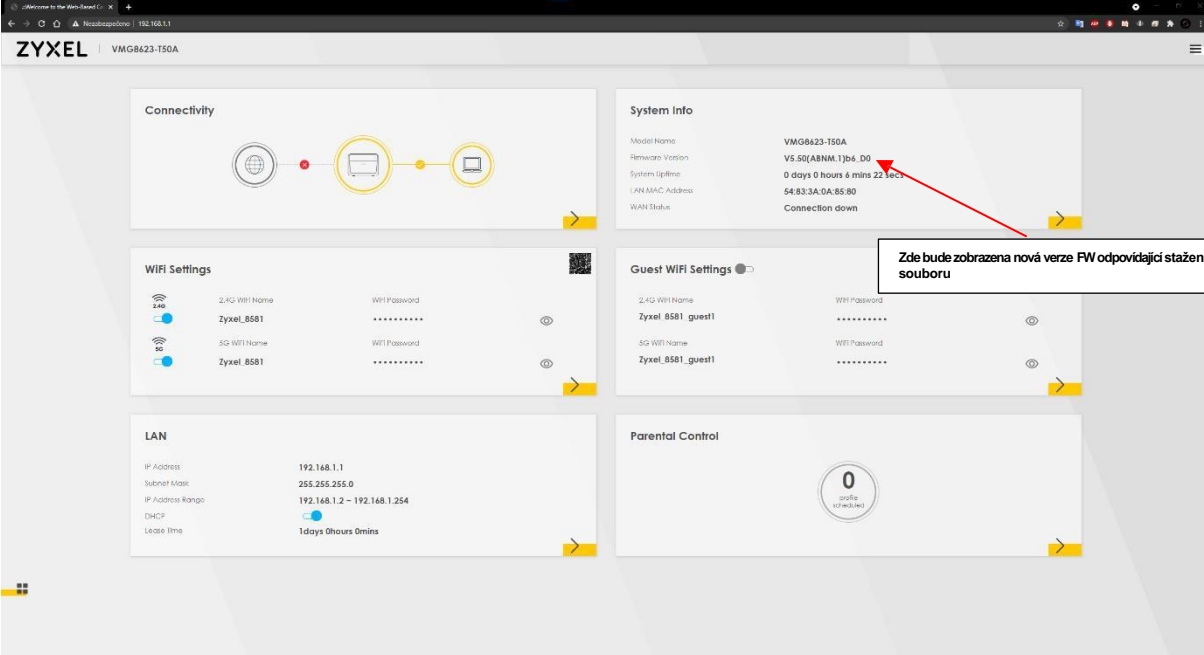

The screenshot shows the Zyxel modem web interface for model VMG8623-T50A. The 'System info' section is highlighted with a red arrow pointing to the 'Firmware Version' field, which displays 'V5.50(ABNM.1)B4\_D0'. A callout box with the text 'Zde bude zobrazena nová verze FW odpovídající staženému souboru' (Here will be shown the new version of the FW corresponding to the downloaded file) is positioned over the 'Firmware Version' field. Other sections visible include 'Connectivity', 'WIFI Settings', 'Guest WIFI Settings', 'LAN', and 'Parental Control'.

Field	Value
Model Name	VMG8623-T50A
Firmware Version	V5.50(ABNM.1)B4_D0
System Uptime	0 days 0 hours 6 mins 22 secs
LAN MAC Address	54.83.3A.0A.85.80
WAN Status	Connection down